

## MATERIAL INFORMATION

Description:	Printable polyester/vinyl Type II wallcovering with highly reflective surface available in silver, black, copper and gold
Width:	54"
Weight:	20oz/Linear Yard (13oz/yd2)
Physicals:	Meets or exceeds federal specification CCCW-408-D Type II Class A No harmful off gassing Low VOC emitting

## APPLICATIONS

Standard commercial wallcovering pastes/primers and techniques

## Type II Properties

Breaking Strengths, lbs force:

Machine Direction-warp:	Exceeds Type II minimum of 50lbs
Cross Machine Direction-fill:	Exceeds Type II minimum of 55lbs

Tearing Strengths, Scale:

Machine Direction-warp	Exceeds Type II minimums of 25lbs
Cross Machine Direction-fill	Exceeds Type II minimums of 25lbs

Cold Crack Resistance @ 20° F      No Change

Heat Aging (7days at 158° F)      Does not become stiff, brittle, discolored or show loss of grain


## FIRE CLASSIFICATION: CLASS A – ASTM E-84

Flame and Smoke: Tunnel Test	Class "A" Fire Rated – tested in accordance with ASTM-E84
Flame:	15
Smoke:	205
Passes:	ASTM-E84, NFPA-101

The National Fire Protection Association Life Safety Code 101, Section 6-5.3, "Interior Wall and Ceiling Finish Classification", has a means of classifying materials with respect to Flame Spread and Smoke Developed when tested in accordance with NFP A 255, "Method of Test of Surface Burning Characteristics of Building Materials", (ASTM E-84)

## PRODUCT USE ADVISORY

Onyx meets the digital printing industry standards for materials that enhance image impact and color, depth, dimension and durability. This product is a Type II commercial digital wallcovering with a Class "A" fire rating.

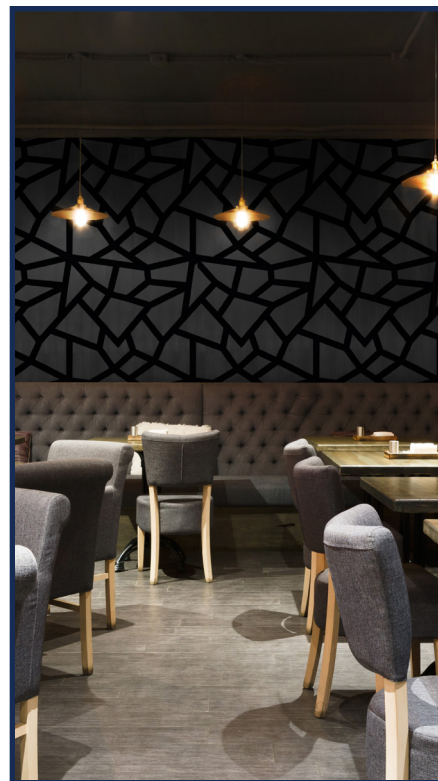

**Glossy Digitally  
Printable Wallcovering**

**PICTURA™**  
INTERIORS

